

FIG. 1 is a perspective view of a device 100 in accordance with the present invention. The device 100 includes a base 102, a top plate 104, and a side plate 106. The base 102 is connected to the top plate 104 by a hinge 103. The side plate 106 is connected to the top plate 104 by a hinge 105. The side plate 106 includes a handle 107 and a locking mechanism 108.

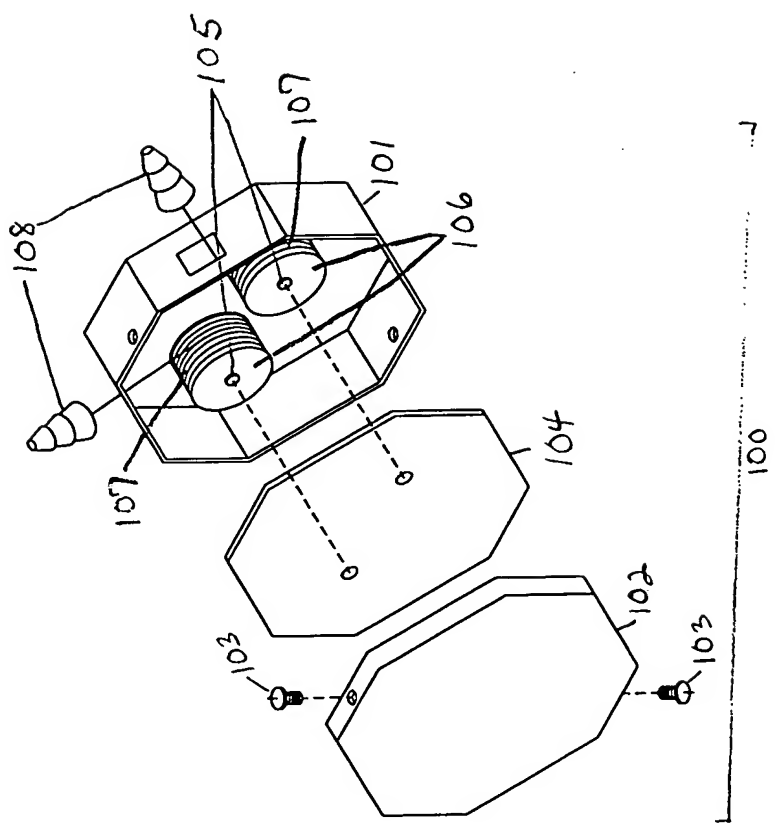


FIG. 1

